


METER LOOP INSTALLATION GUIDE FOR: METER POLE 200 AMP SERVICE, 120/240 VAC

Bill of Material:

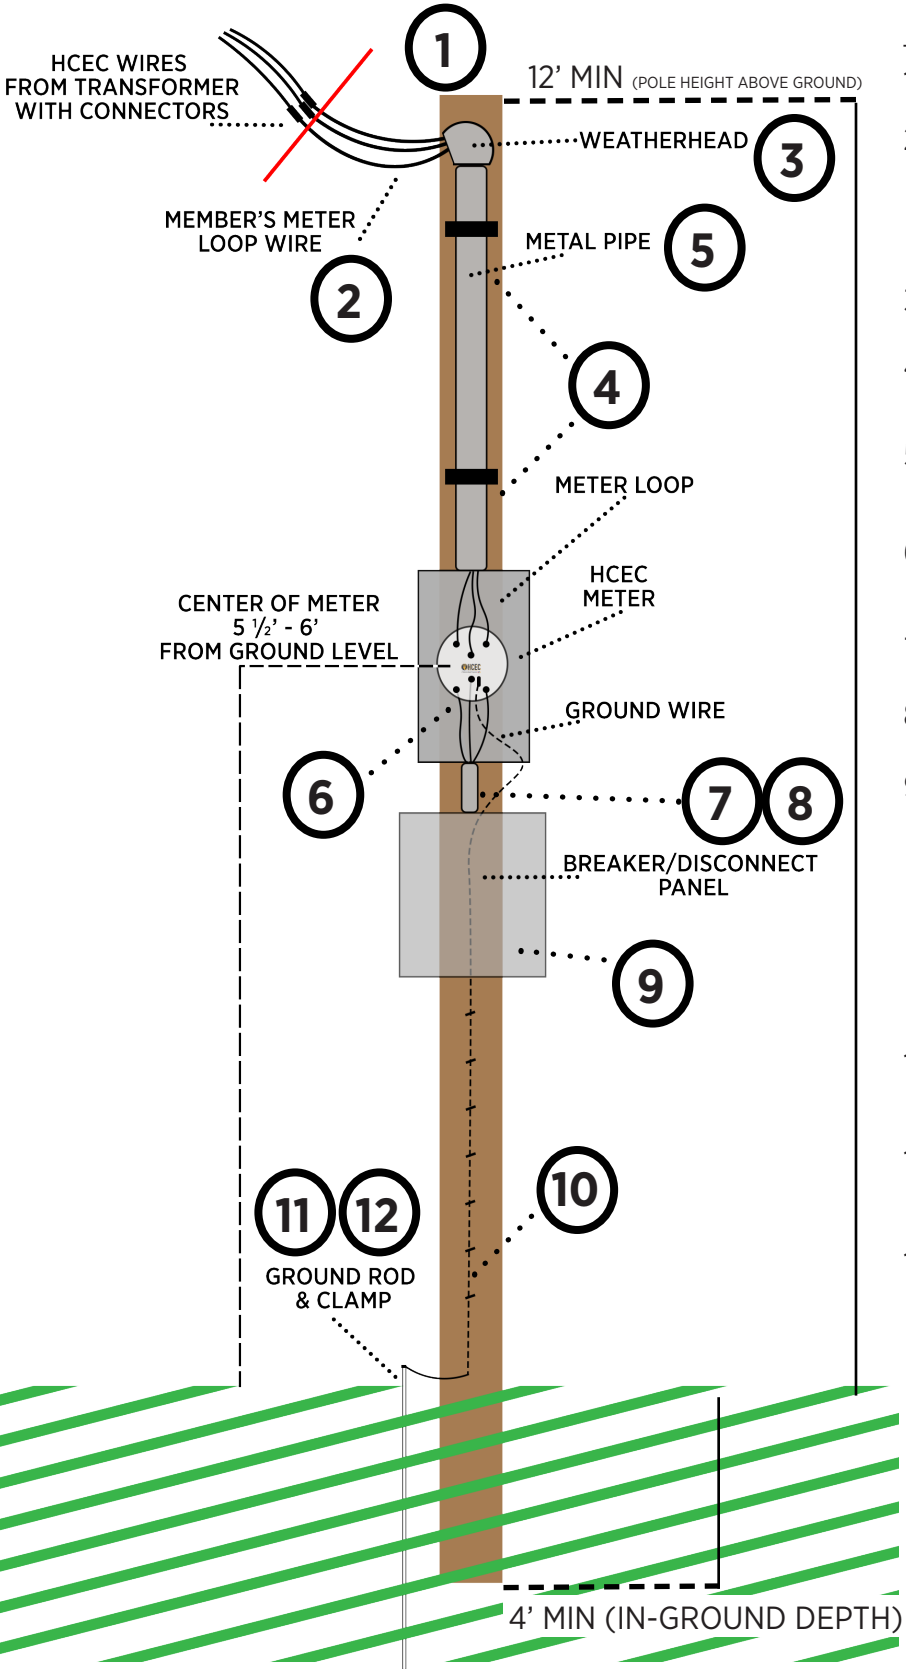

ITEM	QTY	DESCRIPTION
1	1	16' (min.), 6" X 6" treated pole
2	As Req'd	2/0 stranded copper cable with 90 C Insulation rating Type RHH, THHN, THHW, or XHHW. See note below.
3	1	2" Weatherhead
4	4	2" conduit straps with screws (Nails NOT acceptable).
5	As Req'd	2" rigid metal or E.M.T. conduit with weather tight connectors.
6	1	Meter Socket (Furnished by HCEC)
7	1	2" nipple.
8	2	2" conduit locknuts.
9	1	2-Pole 200 AMP Weatherproof fused disconnect switch with 2" hub, or 200 AMP weatherproof load center with 2"hub (No more than a 6 circuit breaker panel is allowed without a main breaker)
10	As Req'd	Min. 6 solid soft drawn copper wire.
11	1	Ground clamp approved for the type of ground rod used.
12	1	8' by 1/2" copper coated ground rod is preferred or 8' by 5/8" galvanized ground rod is acceptable. The ground rod must be driven to ground level.

NOTE: Leave a minimum of 18" conductor extending from the weatherhead.